

Information for users

EN 420+A1:2009

EN 388:2016 EN 407:2004

EN

PPE CATEGORY II



Read the instructions carefully.



In accordance with the requirements of the Regulation (EU) 2016/425.

Product: Five-fingered gloves, knitted, latex coating.

Design:	„COLCA“	Code:	3420 026 706 XX	Size:	8, 9, 10, 11
Material:	60% Cotton, 40% Polyester, coating latex.				

Purpose: They may serve as a protection of hands against dirt and protection in the working areas where workers have to face minor mechanical hazards (abrasions, soiling...), for example when electronics industry/ precision assembly, packing, inspection, cleanroom / automotive assembly, small parts handling. The gloves are resistant to contact heat to 100 °C for 20 seconds. Put the gloves on dry, clean hands.

Levels of performance are based upon the results of laboratory tests, which do not necessarily reflect actual conditions in the workplace. The protection levels (classes) are determined based on the tests carried out in accordance with the conditions determined in the valid standards specified below. (The higher the number, the higher the protection factor).

EN 388:2016	A (0-4)	Abrasion resistance:	Performance level 2	 A.B.C.D.E.F.	The protection works only against the specified hazards. Do not use the gloves as a protection against different hazards and classes. The results apply only for the model classes, not for the protection levels (classes). As for the gloves with two or more layers it does not necessarily reflect the properties of the outer layer. The protection levels (classes) apply only for new gloves not washed or cleaned.
	B (0-5)	Blade cut resistance (coupe test)	Performance level 1		
	C (0-4)	Tear resistance	Performance level 2		
	D (0-4)	Puncture resistance	Performance level 1		
	E (A-F)	Cut Resistance (TDM)	Performance level X		
	F(P/X nebo nic)	Impact protection	Performance level X		
EN 407:2004	A (0-4)	Burning resistance	Performance level X	 A.B.C.D.E.F.	
	B (0-4)	Contact heat resistance	Performance level 1		
	C (0-4)	Convecting heat resistance	Performance level X		
	D (0-4)	Radiant heat resistance	Performance level X		
	E (0-4)	Resist. to small splashes of molten metal	Performance level X		
	F (0-4)	Resist. to large splashes of molten metal	Performance level X		
EN 420 - protective gloves (general requirements)					
	(1-5)	Dexterity	Performance level 5		
„X“ = test not performed or not applicable.					

„X“ = test not performed or not applicable.

Please note: The user must check the gloves before and after use to verify that they are in the required condition. Do not use as a protection against different hazards and classes. Do not use the gloves for handling with sharp objects, flames, toxic chemicals or greasy objects. Not resistant to soaking. It is not allowed to wear these gloves in cases with risk of entanglement with moving parts of machines. Due to the dulling of the blade during the cut resistance test (B) the results of the cut tests are only indicative, while the TDM (E) cut resistance test is the result of the reference design. The gloves comply with the requirements for puncture resistance. However, they are not meant for protection against thin, sharp objects, such as injection needles. The mentioned facts may help the user for rational use of this type of protective gloves. It is the responsibility of every user to judge, whether the gloves are used in suitable conditions.



Maintenance, lifetime: After use, make sure the gloves are removed from all pollutants. Thus, you will extend their lifespan. The gloves are designed for single or short-term use only. Dry a damp muff gloves away from sources of heat at the room temperature. Gloves should not be washed. Any dirt should be brushed out using a soft brush, latex Wipe with a damp cloth. Do not clean chemically, bleach, dry in a tumble dryer, or iron. Worn through, burned through, strongly fouled or stiffened pairs have to be replaced with new ones. We are not responsible for any reduction of the protective function due to incorrect care. Under suitable storage conditions, shelf life is 2 years.

Storing and transport: Storing in a clean, dry and ventilated place at the room temperature, without any contamination by moisture, dirt, mould, or other agents reducing the level of protection. Do not expose it to solar radiation. The supplier doesn't provide warranty for such damage. Carry them preferably in original package.





Accessories: The product is supplied without accessories.


Dangerous admixtures: Gloves contain natural Latex. They may cause an allergic reaction if used by sensitive people, including anaphylactic shock. If skin irritation or allergic reaction do not use gloves and contact your doctor immediately.

Disposal: Dispose of used gloves with respect of the soiling level according to the applicable disposal regulations and the regulations of the local authority. Unused gloves can be disposed of with domestic waste.

The Notified Body that performs conformity assessment: Notified Body No. 2369, VIPO a. s., Gen. Svobodu 1069/4, 958 01 Partizánske, Slovakia.

The Declaration of Conformity can be found here: www.canis.cz; for individual products, in the bar "Documents to download".

Marking - example:	
„COLCA“	Type of gloves
10	Size
 	Pictogram and number of the standard that the product complies with
2121X X1XXXX	Results of the tests carried out
CE	Conformity mark
cat II	Glove category
	Notice on the necessity to read the instructions for use
„A“	Production identification
ZA/2018/666	Lot - mark / year of manufacture / order number
	Manufacturer identification

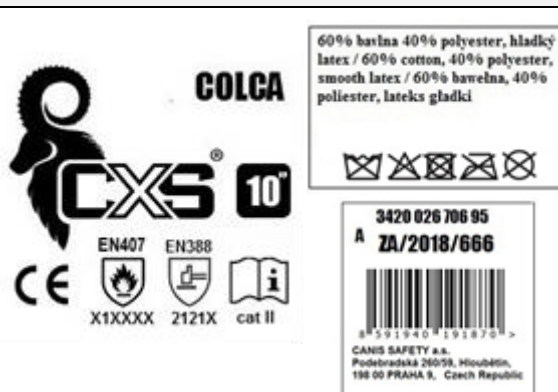

If you need more information, please contact:



Poděbradská 260/59, Hloubětín, 198 00 Praha 9, Czech Republic.